



DIVENTA TUTTO
PIU' FACILE
is all more simple

CORMIDI
leading innovation

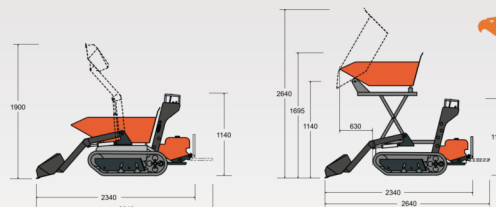

ACCESSORI SERIE DUMPER
DUMPER SERIES ACCESSORIES

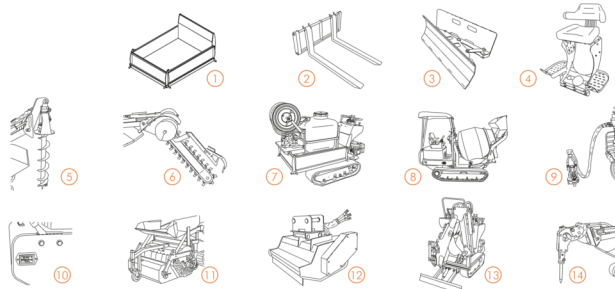

- 1) Cassone agricolo/Agricultural skip 2) Forchetta/Fork 3) Lametta/Blade 4) Sedile/Seat 5) Trivella/Auger 6) Trencher
7) Atomizzatore/Atomizer 8) Betoniera/Concrete mixer 9) Pompa acqua/Water pump 10) Conta ore/Hour counter 11) Spazzola/Brush
12) Trinciamenti/Seed shredder 13) Mini escavatore/Mini excavator 14) Martella/Hydraulic hammer

Caratteristiche Tecniche

65 series

80 series

| Motore / Engine | | |
|---|--|--|
| Benzina | Honda GX 270 9hp | Honda GX 390 13hp |
| Diesel | | Yanmar LN 100 AE 10hp |
| Trasmissione / Transmission | | |
| Tipo / Type | idrostatica / hydrostatic | idrostatica / hydrostatic |
| Pompa idraulica / Hydraulic pump | 2x port. variabile/2x variable disp. | 2x port. variabile/2x variable disp. |
| Portata / Flow | 2 x 25.2 l/min (2x6.6 gpm) | 2 x 32.4 l/min (2x8.5 gpm) |
| Motore Idrraulico / Hydraulic motors | 2x orbitali / 2x orbital | 2 x orbitali / 2x orbital |
| Freno di Stazionamento / Brake parking | Meccanico / Mechanical | Meccanico / Mechanical |
| Impianto idraulico / Hydraulic system | | |
| Pompa idraulica / Hydraulic pump | Ad ingranaggi / Gear pump | Ad ingranaggi / Gear pump |
| Portata Std / Flow Std | 1x13.5 l/min (1x3.6 gpm) | 1x13.5 l/min (1x3.6 gpm) |
| Portata Hi-Flow / Hi-flow | 1x22 l/min (1x5.8 gpm) | 1x22 l/min (1x5.8 gpm) |
| Pressione massima / Max pressure | 150 bar (2180 psi) | 150 bar (2180 psi) |
| Distributore / Main valve | 2/3 elementi / 2.3 way | 2/3 elementi / 2.3 way |
| Raffreddamento idraulico / Cooler system oil | aria / air | aria / air |
| Ribalamento cassone / Skip tipping system | Idraulico / Hydraulic | Idraulico / Hydraulic |
| Softocarro cingolata / Tracks | | |
| Larghezza cingoli / Standard track width | 180 mm (7.1 in) | 180 mm (7.1 in) |
| Rulli inferiori / Track roller | 3 | 3 |
| Rulli oscillanti / Rocking rollers | Si / Yes | Si / Yes |
| Regolazione tensione cingoli / Track tensioning | Si / Yes | Si / Yes |
| Prestazioni e dimensioni / Performance and dimensions | | |
| Velocità / Max travel speed | 0-4.5 Km/h (0-2.8 mph) | 0-4.8 - 0-6.3 km/h (0-3 / 0-3.9 mph) |
| Capacità operativa / Operative weight | 650 Kg (1432 lb) | 800 Kg (1762 lb) |
| Peso / dry weight | 395 Kg (870 lb) <-> 495 Kg (1090 lb) | 420 Kg (925 lb) <-> 520 Kg (1145 lb) |
| | 495 Kg (1090 lb) <-> 595 Kg (1310 lb) | 520 Kg (1145 lb) <-> 620 Kg (1366 lb) |
| Lunghezza max / Overall length | 1700 mm (67 in) <-> 2300 mm (91 in) | 1700 mm (66.9 in) <-> 2300 mm (90.6 in) |
| Larghezza max / Overall length | 800 mm (31.5 in) <-> 850 mm (33.5 in) | 800 mm (31.5 in) <-> 850 mm (33.5 in) |
| Altezza max / Overall height | 1140 mm (45 in) | 1140 mm (44.9 in) |
| Altezza di scarico al perno / Maximum height skip pivot pin | 1440 mm (56.7 in) | 1440 mm (56.7 in) |
| Cassone dumper / Standard tip skip | 1150 x 800 x 350 mm (45.3x31.5x13.8 in) | 1150 x 800 x 350 mm (45.3x31.5x13.8 in) |
| Cassone dumper / Standard tip skip | 1150 x 680 x 350 mm (45.3x26.8x13.8 in) | 1150 x 680 x 350 mm (45.3x26.8x13.8 in) |
| Cassone agricolo / Agricultural skip | 1100 (1350 max) x 800 (1300 max) mm x 250 mm | 1100 (1350 max) x 800 (1300 max) mm x 250 mm |
| Cassone agricolo / Agricultural skip | 43.3 (53.1 max) in x 32.5 (51.2 max) in x 9.8 in | 43.3 (53.1 max) in x 32.5 (51.2 max) in x 9.8 in |

1) A richiesta / Optional 2) Standard / Standard tip type 3) Autocaricante / Self loading type 4) Versione Scarico Alto / Hi-tip type 5) Solo per la versione Std / Only for standard tip type 6) Solo per la versione Std / Only for standard tip type 7) Solo per la versione Diesel / Diesel type only